

PM5 Series (Model PM5L)

180° Copper Directional Light

Solid Copper Top with white painted bottom for optimal reflectivity. Used with copper Swivel Arm (shown) for adjustable angles

Dimensions: 2-1/8" x 5 -3/4"

Wire Lead: 18/2 landscape cable (includes Quick Connectors)

Lens: Tempered Borosilicate Glass

Lamp: G4 Bi-pin Lamp, 5 watt LED standard. Optional 2, 3, or 4 watt LED or chose halogen lamp (35 watt maximum)


Lamp Base: G4 / G6.35 ceramic holder rated


250V, 1000 watt.

Mount: Standard Ground Stake (GS)or optional surface mount. Must use SW-ARM with power socket. Standard lengths available from 9" to 40".

Finish options include Polished, Brushed Satin, and custom Antique (additional charge applies)

PHOTOMETRICS



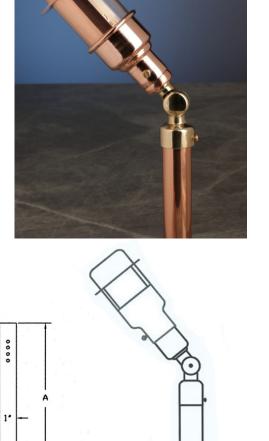

Conforms to UL Standard 1838

3182781

1094 No. Main St. - P. O. Box 98 - Ashland City, TN 37015