



CS9100 Professional Series Landscape Lighting System

Supplemental Wiring Instructions


To clarify installation and wiring of your 100 watt Professional Series power transformer, please refer to the instructions below.

1) USE ONLY THE BOTTOM SCREW TERMINALS TO ATTACH THE MAIN CABLES FROM THE LIGHT FIXTURE RUNS. DO NOT LOOSEN TOP SCREWS OR REMOVE WIRES ATTACHED TO THE TOP SCREWS.


2) EACH MAIN CABLE RUN MUST BE CONNECTED TO 1 (LEFT) AND 2 (RIGHT). SEE DIAGRAM BELOW (SHOWING UP TO 2 MAIN CABLE RUNS).

3) ATTACH ONE SIDE OF THE MAIN CABLE RUN TO THE LEFT TERMINAL (1) BY INSERTING THE STRIPPED WIRE (APPROX. $\frac{3}{4}$ ") INTO THE BOTTOM OF THE TERMINAL BLOCK. ATTACH THE OTHER SIDE OF THE MAIN CABLE RUN TO THE RIGHT TERMINAL (2). TIGHTEN BOTTOM TERMINAL SCREWS TO SECURE EACH WIRE.

CAUTION: DO NOT LOOSEN TOP SCREWS OR REMOVE ANY WIRES IN TOP PORTION OF TERMINAL BLOCK!

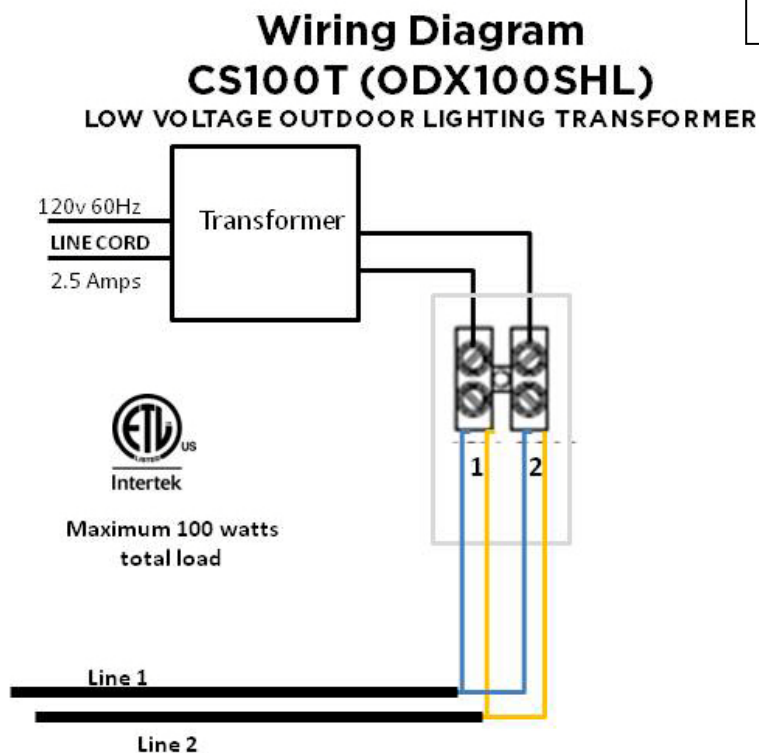


Transformer Terminal Block

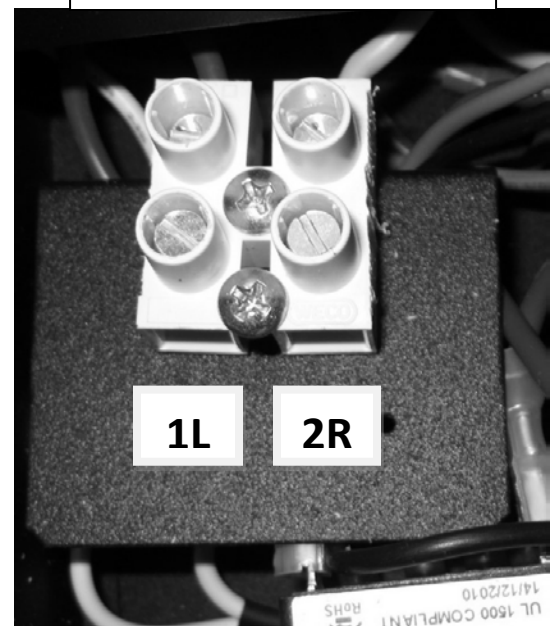


Insert one side of each main cable run into the bottom of the terminal block in the (1) LEFT screw terminal and one side in the (2) RIGHT screw terminal.



CS9100 Professional Series Landscape Lighting System – pg. 9

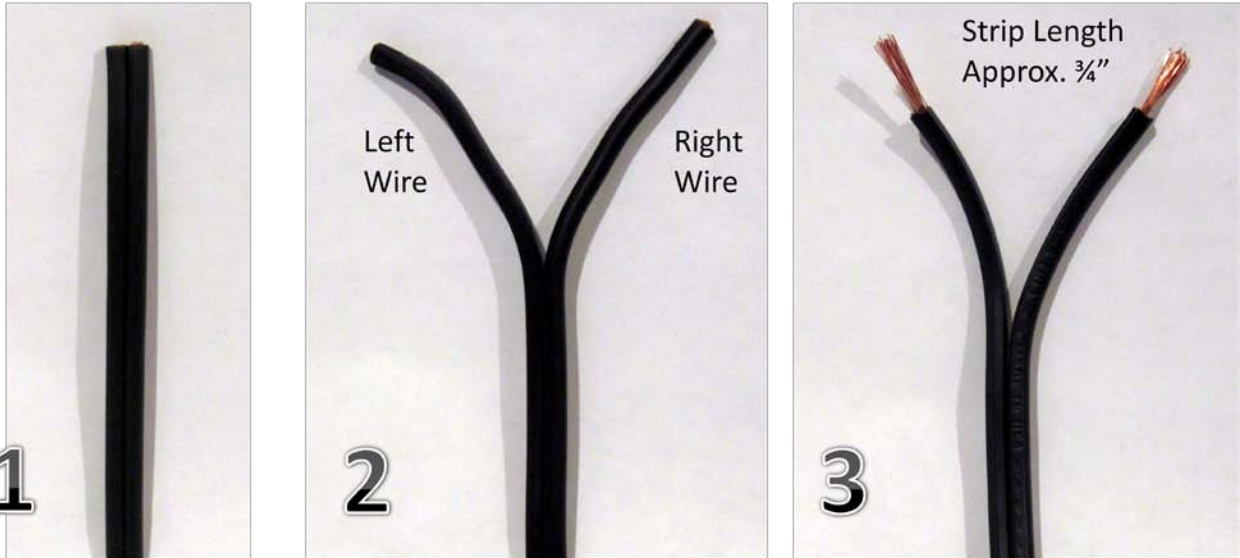

- Each 14/2 main cable must be split in the middle to create a left and right side.
- Strip the outer insulation from each wire approximately $\frac{3}{4}$ " of an inch to expose the copper stranded wires

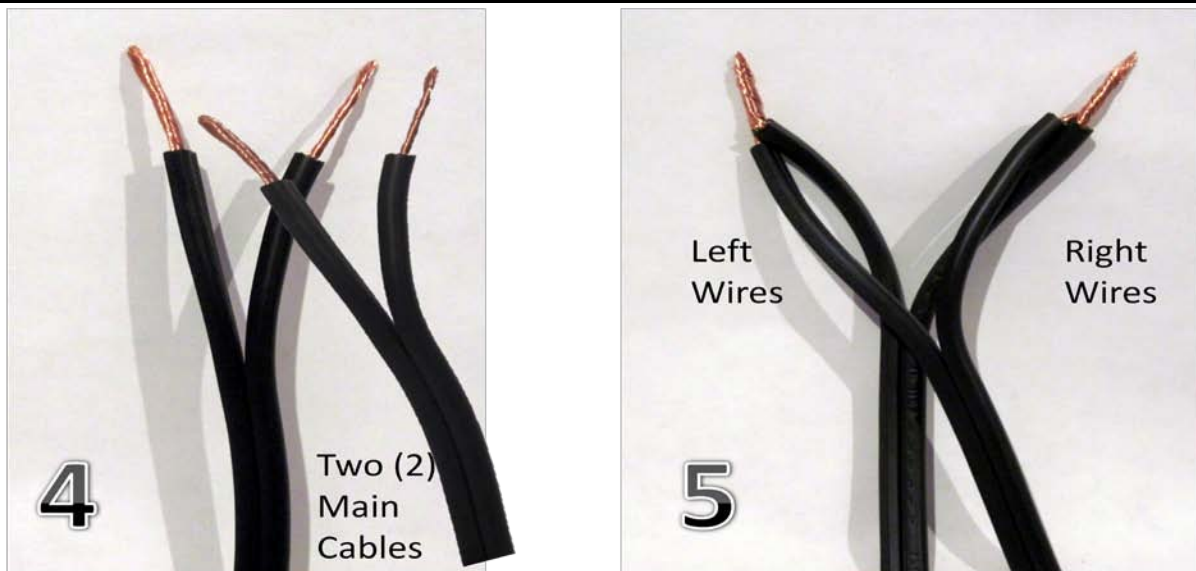

- For a single home run cable, twist the strands of copper wire together tightly for each side.
- For more than one home run cable, twist the strands of copper wire together, combining each side together tightly as shown in #5 to make a completed wire harness. Make sure the left and right sides of each cable are separated.