



# PM5 Series (Model PM5)

## 180° Copper Directional Light

**Solid Copper Top** with white painted bottom for optimal reflectivity. Used with copper Swivel Arm (shown) for adjustable angles

**Dimensions :** 1-1/2" x 5 -1/8"

**Wire Lead:** 18/2 landscape cable (includes Quick Connectors)

**Lens:** Tempered Borosilicate Glass

**Lamp:** G4 Bi-pin Lamp, 5 watt LED standard. Optional 2, 3, or 4 watt LED or chose halogen lamp (35 watt maximum) )




**Lamp Base:** G4 / G6.35 ceramic holder rated 250V, 1000 watt.

**Mount:** Standard Ground Stake (GS) or optional surface mount. Must use SW-ARM with power socket. Standard lengths available from 9" to 40".

**Finish options** include Polished, Brushed Satin, and custom Antique (additional charge applies)



### PHOTOMETRICS

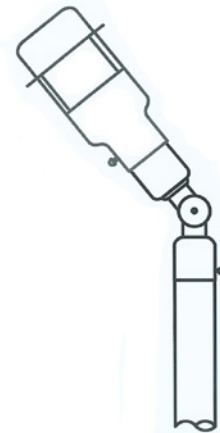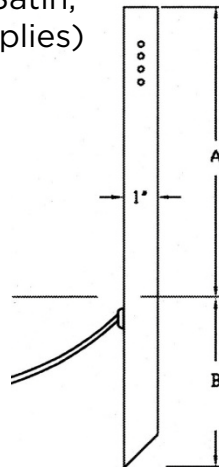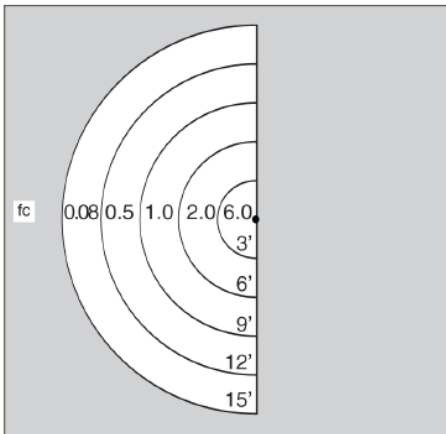

**Conforms to UL Standard 1838**



**3182781**