



P.M. Lighting, LLC

Ph. 615.792.6884

Fax 615.792.6898

PM5 Series (Model PM5)

180° Copper Directional Light

Solid Copper Top with white painted bottom for optimal reflectivity. Used with copper Swivel Arm (shown) for adjustable angles

Dimensions : 1-1/2" x 5 -1/8"

Wire Lead: 18/2 landscape cable (includes Quick Connectors)

Lens: Clear Shatter Resistant Globe

Lamp: G4 Bi-pin Lamp, 4 watt HO LED standard. Optional 2, 3, or 4 watt LED




Lamp Base: G4 / G6.35 ceramic holder rated 250V, 1000 watt.

Mount: Standard Ground Stake (GS) or optional surface mount. Must use SW-ARM with power socket. Standard lengths available from 9" to 40".

Finish options include Polished, Brushed Satin, and custom Antique (additional charge applies)



PHOTOMETRICS

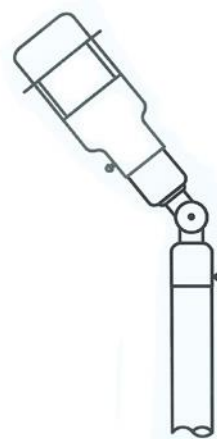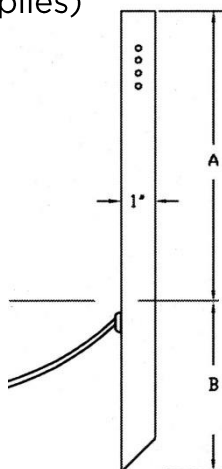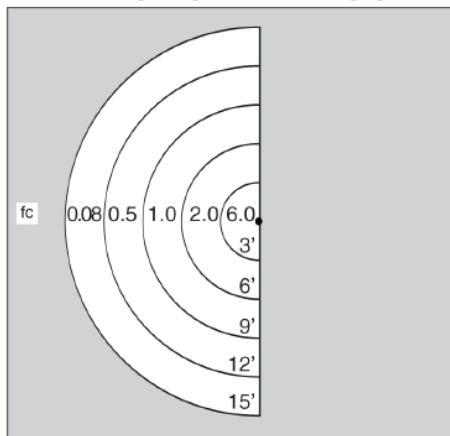

**Conforms to UL
Standard 1838**



**Intertek
3182781**

1094 No. Main St. - P. O. Box 98 – Ashland City, TN 37015

www.pmlighting.com