



**P.M. Lighting, LLC**

**Ph. 615.792.6884**

**Fax 615.792.6898**

## **PM5 Series** (Model PM5L)

### 180° Copper Path Light

Solid Copper Top with white painted bottom for optimal reflectivity. Can also be used with copper Swivel Arm for adjustable angles (See Directional Lights)

**Dimensions :** 2-1/8" x 5 -3/4"

**Wire Lead:** 18/2 landscape cable  
(includes Quick Connectors)

**Lens:** Clear Shatter Resistant Globe

**Lamp:** G4 Bi-pin Lamp, 4 watt LED standard.  
Optional 2, 3, or 4 watt HO (High Output) LED



**Lamp Base:** G4 / G6.35 ceramic holder rated  
250V, 1000 watt.

**Mount:** Standard Power Stake (PS) Standard  
lengths available from 12" to 40".

**Finish options** include Polished, Brushed Satin,  
and custom Antique (additional charge applies)



### PHOTOMETRICS

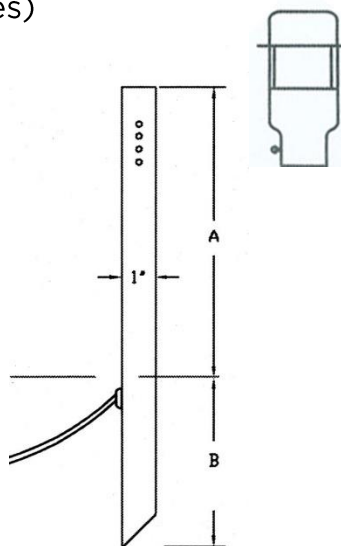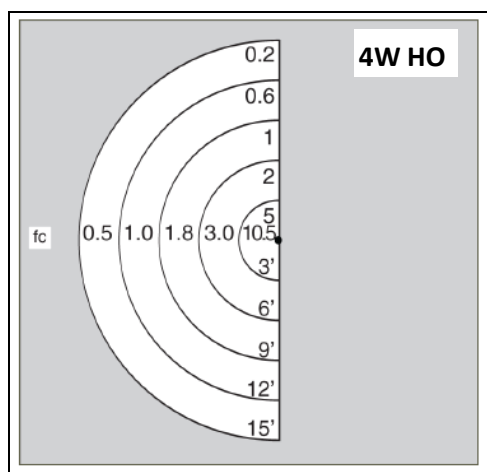

**Conforms to UL  
Standard 1838**



**1094 No. Main St. - P. O. Box 98 – Ashland City, TN 37015**

**[www.pmlighting.com](http://www.pmlighting.com)**